

IRD 3200 Tinted Infrared Heater- Wall Mounted - 3.2 kW

Stock code 2684-4745

The IRD 3200 adapts perfectly to any environment thanks to its minimalist and stylish design. The powerful tinted radiator heats in 3 heating levels to provide comforting warmth, also conveniently switchable via IR remote control.


With the production of a clean, condensation-free, odorless, and heat-free effect produced without raising dust, the radiant heater is also suitable for allergy sufferers.

the 90 ° adjustable tilt angle, the spotlight shields a large field of affect.

The device also proves to be a superior product of the top class in outdoor use, because it is protected against dust as well as splash and jet water according to protection class IP55.

Because the IRD 3200 emits its radiant energy predominantly in the medium and long-wave infrared spectrum, it causes a uniform and targeted heat distribution without heating up the ambient air. Therefore, it is ideal for sheltered areas such as terraces, balconies, and outdoor areas of restaurants.

The equipment of the IRD 3200 is completed by the 24-hour timer, the operating indicator light, and an LED display. The tinted radiator is also suitable for wall mounting – the holder for is included. The device is maintenance-free since a light source change is no longer necessary.

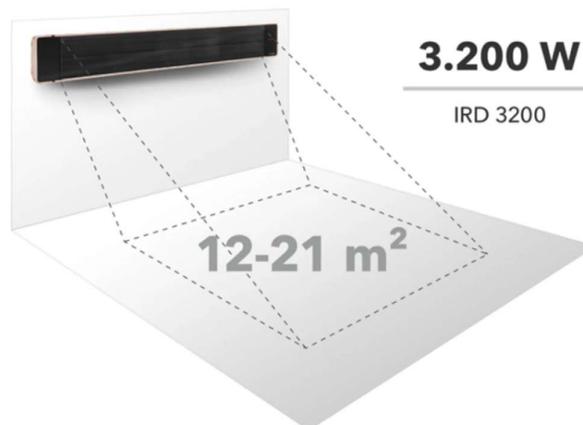

A few practical benefits

- Stylish solution for architecturally sophisticated sheltered outdoor areas
- IR-B and IR-C provide cozy warmth without light emission
- Uniform and targeted heat distribution
- Clean, condensation-free, odourless and without noise
- No dust raising, therefore suitable for allergy sufferers
- Spray and jet-proof, protection class IP55
- 3 heating levels, up to 3,200 watts
- Aluminum design housing
- 24-hour timer
- LED display
- Adjustable inclination angle - with large field of effect
- Suitable for wall mounting
- Infrared remote
- Power-on indicator
- Including wall mount

Technical data

Heating capacity	[W]	3,200
	Level Max. [kW]	3.2
Power supply	220 - 240 V/50 - 60 Hz	
IP Type of protection	IP55	
Equipment	Infrared Remote control On/Off Switch Inclination 90 ° Operating control lamp Timer function Wall mounting Ceiling mounted Aluminium	